

PROCHEM

Your Source for Local Supply and Support

PIPING PRODUCTS
STAINLESS WATER SOLUTIONS



PIPING PRODUCTS



INSTRUMENTATION



VALVES AND ACTUATORS



MANUFACTURING



INDENT SERVICE



HYDRAULIC



Stainless Water Solutions Package



PROVIDING A COMPREHENSIVE VALUE ADDED SERVICE

At Prochem we recognise industry requirements in providing a comprehensive value added service including the supply of pipe and fittings. To this end, we have introduced a Stainless Water Solutions Package.

In addition to product supply, Prochem offers a pipe cutting and roll grooving service that is quality controlled, meeting the highest industry standards for stainless steel mechanically joined systems.

Where required, Prochem will arrange fabricated components and assemblies to meet engineering specifications for Process, Drinking, Desalination, Fire Service, Marine and other water applications.

With Prochem's Quality Assurance program we will meet industry requirements in Water, Mining, Refining, Food & Beverage Processing and the Offshore Oil & Gas Industries.



WHERE STAINLESS STEEL IS THE PREFERRED MATERIAL


PROCESS WATER

This covers a wide scope of applications including building services, industrial, mining and irrigation. Generally, these water applications cover air-conditioning systems – condenser water lines, factory feed water lines, wash down lines and many other non-drinking water applications.

Stainless pipes, valves and fitting products which are used for this market sector, do not require the material to be certified in accordance with the plumbing industry drinking water criteria, but may specify ASTM, grade and/or wall thickness relevant to the specific service applications.


DRINKING WATER (Potable)

This is an application where pipes, valves and fittings are used for the purpose of supplying water to buildings where water is mainly used for consumption.

Water supply systems and materials of this type are installed by hydraulic services, “plumbers”, in accordance with the Plumbing Code of Australia (PCA). This plumbing code specifies that all material used for drinking water applications shall be tested and certified against relevant product standard to ensure they meet the minimum requirements of the Australian Standard for Plumbing AS 3500 Parts 1, 4 & 5. The code also requires stainless materials used for drinking water requirements to have a minimum pitting resistance equivalent number (PREN) of 22. 316/316L stainless steel meets the minimum PREN requirements thus is the “material of choice” for this market. The approved products are known as WaterMark and bare the WaterMark logo. 

Under the plumbing standard for water piping installation, Parts 1, 4 & 5, the plumbing system must be installed with products that clearly show this certification mark.

The added advantages of using stainless piping systems is that they can be used for ablution and/or supply to fire fighting services through one (1) single pipeline.

The Prochem stainless pipe range, includes both schedules 5S & 10S in 316/316L dual grade, and are certified to the Australian Standard. The pipes are marked identifying the material grade, specification number, manufacturer’s name, licence number, heat trace number and carry the WaterMark logo. 

Plumbers working in this market should always ask for stainless products which carry the WaterMark stamp of approval.

RECYCLED AND RE-USED WATER SYSTEMS

Stainless pipes and fittings are the “material of choice” for these applications. Grade 316/316L with roll grooved pipe fittings meet the industry requirements, thus providing strength, long-life, cost benefits and corrosion resistance. Recycled water piping shall also meet the requirements of the Plumbing Code of Australia (PCA).

FIRE SERVICE SYSTEMS

The use of stainless piping offers the ideal solution where the systems are regularly tested and new water is introduced.

Stainless pipes and fittings are in accordance with AS 2419 and AS 2118, approved for fire hydrants and fire sprinkler system applications.

MARINE APPLICATIONS

Stainless grade 316/316L is most commonly used today in the construction of buildings and water supply services where marine and aggressive environments are encountered. Stainless steel is recognised as the premium material for marine applications offering excellent corrosion resistance, strength and hardness. 316/316L grade stainless has an excellent oxidation resistance for the long term protection of the pipe and fitting structures.

316/316L stainless resists rusting in most architectural applications and is often chosen for more aggressive environments such as industrial and sea-front buildings, wharves and piers.

Benefits of Stainless Steel in Water Applications

Stainless has a higher strength and ductility when compared to general steel, copper, plastic, cast iron pipes and fittings. The higher strength results in a reduction of wall thickness required for the service pipe.

Coatings or cathodic protection is not required for stainless in most locations. A thin adherent chromium-oxide layer provides the corrosion protection. This chromium-oxide layer is self healing, therefore, no extra corrosion protection is required.

Stainless is much more resistant to erosion corrosion caused by high flow rates and particulate matter than that of steel and copper. Grade 316/316L stainless pipes can handle high velocity and turbulence with minimal affect on the wall thickness.

Stainless retains low hydraulic friction properties as compared to other metallic piping systems. This results in lower water pressure losses and pump energy savings.

Having excellent ductility and the ability to be formed and welded into lightweight shapes, assists in the ease of pipeline installation. Stainless piping systems are interchangeable and easily coupled together with other materials used in general fluid applications.

Note: *It is recommended to refer to a galvanic series table when combining different materials*

Environmental and Cost Benefits of Stainless Pipe and Fittings

Stainless lasts longer and costs less over its desired lifetime. It achieves these two (2) aims primarily because it is corrosion resistant and durable. Stainless is very strong, defending against wear and tear that typically increase maintenance costs.

The heat and corrosion resistance properties of stainless also significantly add to its life-cycle advantages by decreasing down-time and maintenance.

Stainless meets the challenge of environmentally friendly product, being completely recyclable and causing minimal negative impact on the environment.

Stainless requires less post fabrication processes and therefore is less harmful to the environment.

Stainless lasts longer, lowering the strain on valuable resources.

Stainless Pipe and Fittings

Stainless pipe and fitting products are the “material of choice” for carrying process and drinking water, industrial water, sanitary fluids, slurries and gasses particularly when elevated pressures or temperatures are involved. Generally, pipe is supplied in either welded or seamless, and for water applications welded pipe is supplied with a wall thickness from schedule 5S through to schedule 40S.

The American Society of Mechanical Engineers (ASME) specifies pipe dimensions. Dimensions are defined by Nominal Pipe Size (NPS), the outside diameter (OD) which is fixed and the pipe schedule which determines the wall thickness (WT). These schedules and dimensions are given in ASME B36.19M. *(Refer: Table 1)*

**TABLE 1 - PIPE DIMENSIONS
AMERICAN NATIONAL STANDARD STAINLESS STEEL PIPE B36.19M**

Nominal Pipe Size	Outside Diameter	Wall Thickness mm/in Weights: kgs Per Metre/lbs Per Foot					
		5S		10S		40S	
DN/in	mm/in	mm/in	kgs/lbs	mm/in	kgs/lbs	mm/in	kgs/lbs
25	33.4	1.65	1.32	2.77	2.14	3.38	2.56
1	1.315	0.065	0.88	0.109	1.41	0.133	1.68
32	42.2	1.65	1.69	2.77	2.75	3.56	3.46
1 ¼	1.660	0.065	1.14	0.109	1.81	0.140	2.27
40	48.3	1.65	1.94	2.77	3.18	3.68	4.13
1 ½	1.900	0.065	1.28	0.109	2.09	0.145	2.72
50	60.3	1.65	2.44	2.77	4.01	3.91	5.55
2	2.375	0.065	1.61	0.109	2.64	0.154	3.66
65	73.0	2.11	3.77	3.05	5.37	5.16	8.81
2 ½	2.875	0.083	2.48	0.120	3.53	0.203	5.80
80	88.9	2.11	4.61	3.05	6.59	5.49	11.52
3	3.500	0.083	3.03	0.120	4.34	0.216	7.58
100	114.3	2.11	5.96	3.05	8.54	6.02	16.39
4	4.500	0.083	3.92	0.120	5.62	0.237	10.80
125	141.3	2.77	9.65	3.40	11.79	6.55	22.19
5	5.563	0.109	6.36	0.134	7.78	0.258	14.63
150	168.3	2.77	11.53	3.40	14.10	7.11	28.82
6	6.625	0.109	7.59	0.134	9.30	0.280	18.99
200	219.1	2.77	15.07	3.76	20.36	8.18	43.38
8	8.625	0.109	9.92	0.148	13.41	0.322	28.58
250	273.1	3.40	23.06	4.19	28.33	9.27	61.49
10	10.750	0.134	15.21	0.165	18.67	0.365	40.52
300	323.9	3.96	31.86	4.57	36.99	9.53	75.88
12	12.750	0.155	21.00	0.180	24.19	0.375	49.61



Stainless pipes and fittings are generally supplied in the annealed condition to facilitate fabrication. The pipe system can be readily joined by welding, the use of flanges, roll grooving and in heavier schedules, by threaded end connections or welding.

While there are a number of grades of stainless pipes and fittings, it is the 300 series (austenitic) which are commonly used in water applications. The 300 series includes 316/316L and 304/304L, these are

non-magnetic and have improved corrosion resistance due to varying amounts of chromium (Cr), nickel (Ni) and molybdenum (Mo).

Note: Mo in 316 and 316/316L dual grade only.

For water applications grade 316, 316L or dual grade 316/316L, 304, 304L or dual grade 304/304L are commonly used. However, for drinking water applications dual grade 316/316L is used due to its improved corrosion resistance.

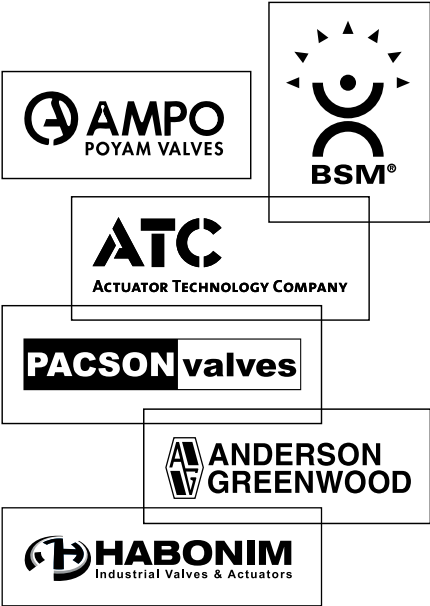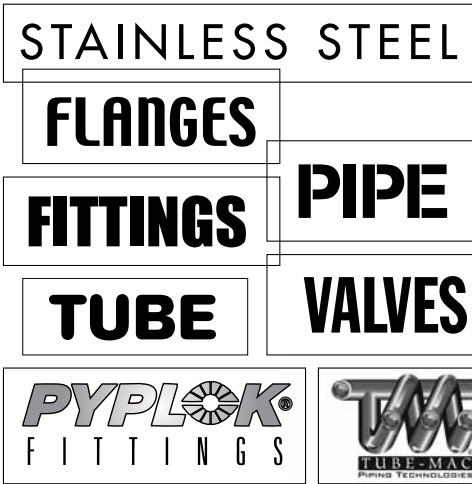



FOR FURTHER DETAILS PLEASE CONTACT YOUR LOCAL PROCHEM OFFICE

ADELAIDE

3A CB Fisher Drive, CAVAN
South Australia
Australia 5094
Telephone 61-8-8241 7633
Facsimile 61-8-8241 7644
Email sales@prochem.com.au

HOBART

96-98 Central Avenue
Derwent Park, Tasmania
Australia 7009
Telephone 61-3-6272 8828
Facsimile 61-3-6272 8688
Email sales@prochem.com.au

PERTH

6 Forge Street
Welshpool, Western Australia
Australia 6106
Telephone 61-8-9458 7777
Facsimile 61-8-9351 8170
Email sales@prochem.com.au

NEW ZEALAND

560 Arthur Porter Drive
Te Rapa Gateway
Hamilton, Waikato, 3200
Telephone 64-7-444 5458
Email nzlsales@prochemgroup.co.nz

BRISBANE

1-5 Kingsbury Street
Brendale, Queensland
Australia 4500
Telephone 61-7-3265 2711
Facsimile 61-7-3265 7430
Email sales@prochem.com.au

MELBOURNE

5-15 Ventura Place
Dandenong South, Victoria
Australia 3175
Telephone 61-3-9799 2244
Facsimile 61-3-9799 2255
Email sales@prochem.com.au

SYDNEY

30 Enterprise Circuit
Prestons, New South Wales
Australia 2170
Telephone 61-2-9727 0044
Facsimile 61-2-9728 6766
Email sales@prochem.com.au

www.prochem.com.au | [1300 287 777](tel:1300287777) | sales@prochem.com.au