

# PROCHEM

*Your Source for Local Supply and Support*

## PIPING PRODUCTS **SAFLOK**



PIPING PRODUCTS



INSTRUMENTATION



VALVES AND ACTUATORS



MANUFACTURING



INDENT SERVICE



HYDRAULIC



# Saflok

## Self-Locking Quick Coupler Range



### Saflok Quick Coupler prevents accidental disconnection

Manufactured as per DIN 2828 and A-A-59326D specification with our patented safety locking cam arm, Saflok provides the best protection for the user and environment.

### SPECIAL CHARACTERISTICS

#### Safety is automatically provided

Saflok improves coupling safety in the transportation of high value and high-risk liquid chemicals. It prevents accidental disconnection or disaster that might occur due to the negligence of human operation or the accidental opening due to natural abrasion of the metal locking cam face.

#### Locks automatically when you close the arms

Close the Saflok quick coupler with one smooth motion – just like a regular quick coupling. It locks itself automatically and stays locked until you open it.

#### Virtually effortless

The Saflok coupler's patented arms are closed and they lock themselves. You release the lock with an easy tug of the finger rings. Every time an operator opens or closes a Saflok coupler, time, effort, and safety concerns are reduced.

### Less risk, less hassle

Operators will appreciate the Saflok coupler because its self-locking action reduces risk automatically. Operators will like it because it works just like a regular quick coupler – without possible hassles or problems.

### Compatible with other quick couplings: A-A-59326D


Now available in all sizes from DN 15 (1/2") to DN 100 (4").

### SAFLOK WORKING PRESSURES

Size	MPa	psi
SAFLOK DN 15 mm (1/2") Coupler	10	1,500
SAFLOK DN 20 mm (3/4") Coupler	10	1,500
SAFLOK DN 25 mm (1") Coupler	10	1,500
SAFLOK DN 32 mm (1-1/4") Coupler	10	1,500
SAFLOK DN 40 mm (1-1/2") Coupler	8	1,200
SAFLOK DN 50 mm (2") Coupler	8	1,200
SAFLOK DN 65 mm (2-1/2") Coupler	5.5	800
SAFLOK DN 80 mm (3") Coupler	4	600
SAFLOK DN 100 mm (4") Coupler	2.5	360



Type A Adaptor

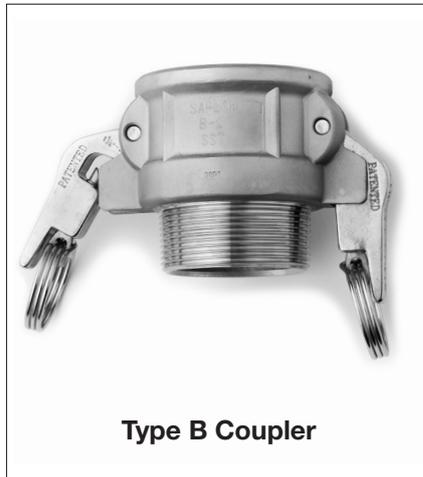

Type B Coupler



Type C Coupler



Type D Coupler




Type E Adaptor



Type F Adaptor




Type DC Dust Cap

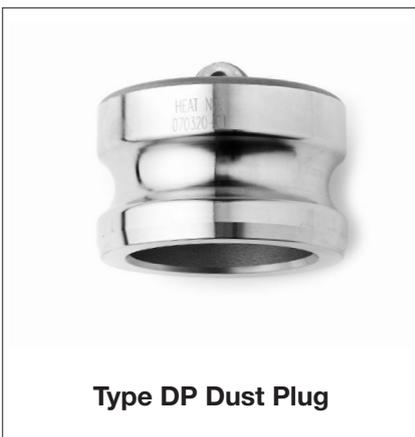

Type DP Dust Plug

### The Saflok Self-Locking Quick Coupler System

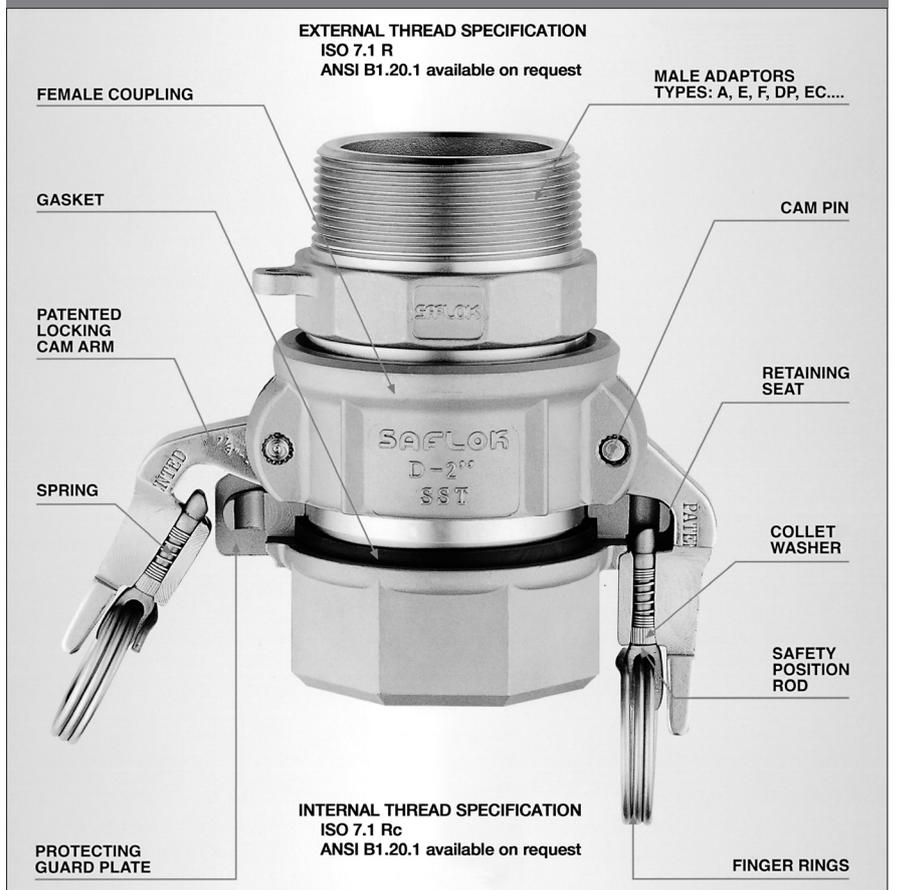



**FOR FURTHER DETAILS PLEASE CONTACT YOUR LOCAL PROCHEM OFFICE**

**ADELAIDE**

3A CB Fisher Drive, CAVAN  
South Australia  
Australia 5094  
**Telephone 61-8-8241 7633**  
Facsimile 61-8-8241 7644  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

**BRISBANE**

1-5 Kingsbury Street  
Brendale, Queensland  
Australia 4500  
**Telephone 61-7-3265 2711**  
Facsimile 61-7-3265 7430  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

**HOBART**

96-98 Central Avenue  
Derwent Park, Tasmania  
Australia 7009  
**Telephone 61-3-6272 8828**  
Facsimile 61-3-6272 8688  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

**MELBOURNE**

5-15 Ventura Place  
Dandenong South, Victoria  
Australia 3175  
**Telephone 61-3-9799 2244**  
Facsimile 61-3-9799 2255  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

**PERTH**

6 Forge Street  
Welshpool, Western Australia  
Australia 6106  
**Telephone 61-8-9458 7777**  
Facsimile 61-8-9351 8170  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

**SYDNEY**

30 Enterprise Circuit  
Prestons, New South Wales  
Australia 2170  
**Telephone 61-2-9727 0044**  
Facsimile 61-2-9728 6766  
Email [sales@prochem.com.au](mailto:sales@prochem.com.au)

[www.prochem.com.au](http://www.prochem.com.au) | [1300 287 777](tel:1300287777) | [sales@prochem.com.au](mailto:sales@prochem.com.au)